

NN30/560S.M



Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	560	d_1 [mm]	≈ 653.6
D [mm]	820	d_s [mm]	12.5
B [mm]	195	n_s [mm]	23.5
Weight [kg]	≈ 349	$r_{1,2}$ [mm]	6
E [mm]	756	s [mm]	11.5
E [mm]	756		

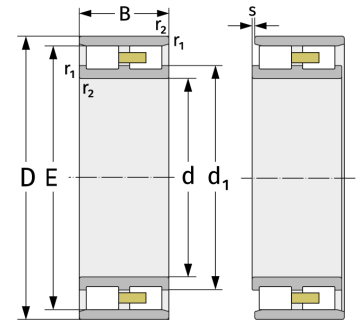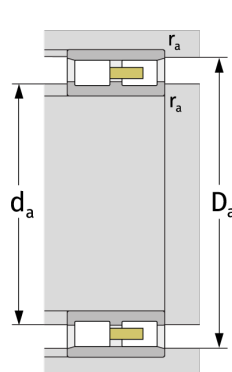

Mating dimensions		Calculation data	
$D_{a, \min}$ [mm]	760	C [kN]	4050
$d_{a, \min}$ [mm]	583	C_0 [kN]	8650
$D_{a, \min}$ [mm]	760	C_u [kN]	680
$D_{a, \max}$ [mm]	797	$n_{G, \text{Fett}}$ [min^{-1}]	780
$r_{a, \max}$ [mm]	5	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	920