

NN3076S.M



Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	380	d_1 [mm]	≈ 449
D [mm]	560	d_s [mm]	9.5
B [mm]	135	n_s [mm]	17.7
Weight [kg]	≈ 115	$r_{1,2}$ [mm]	5
E [mm]	513	s [mm]	9
E [mm]	513		

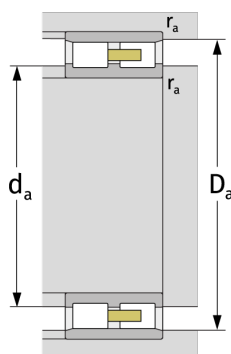

Mating dimensions		Calculation data	
$D_{a, \min}$ [mm]	516	C [kN]	1760
$d_{a, \min}$ [mm]	398	C_0 [kN]	3640
$D_{a, \min}$ [mm]	516	C_u [kN]	318
$D_{a, \max}$ [mm]	542	$n_{G, \text{Fett}}$ [min^{-1}]	1300
$r_{a, \max}$ [mm]	4	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	1500