

NNU4064S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	320	D_1 [mm]	≈ 424
D [mm]	480	d_s [mm]	8
B [mm]	160	n_s [mm]	15
Weight [kg]	≈ 104	$r_{1,2}$ [mm]	4
F [mm]	360	s [mm]	6.4

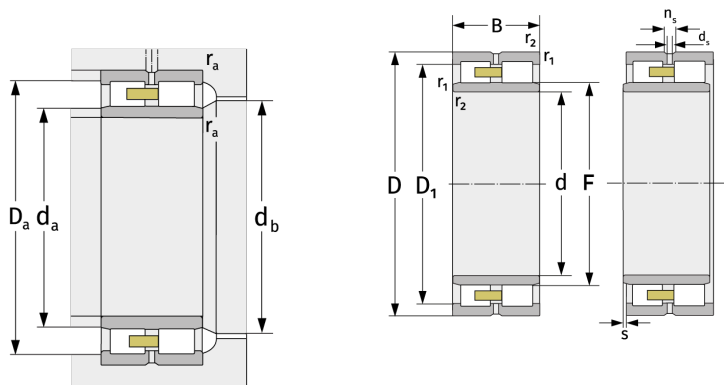

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	335	C [kN]	2130
$d_{a, \max}$ [mm]	358	C_0 [kN]	4380
$d_{b, \min}$ [mm]	364	C_u [kN]	402
$D_{a, \max}$ [mm]	465	$n_{G, \text{Fett}}$ [min^{-1}]	1500
$r_{a, \max}$ [mm]	3	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	1800