

NNU4122S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	110	D_1 [mm]	≈ 157.8
D [mm]	180	d_s [mm]	3.2
B [mm]	69	n_s [mm]	6.5
Weight [kg]	≈ 7	$r_{1,2}$ [mm]	2
F [mm]	129	s [mm]	1.7

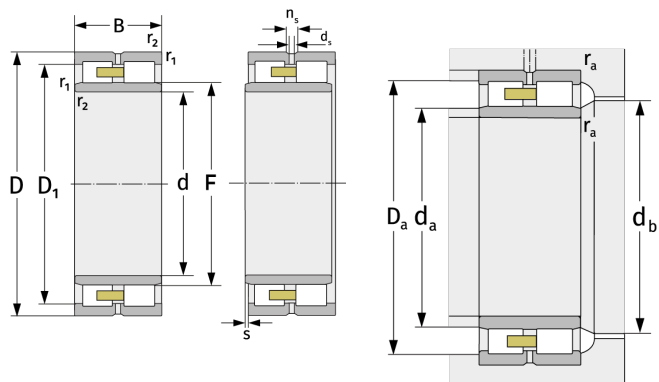

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	121	C [kN]	405
$d_{a, \max}$ [mm]	127	C_0 [kN]	660
$d_{b, \min}$ [mm]	131	C_u [kN]	80.6
$D_{a, \max}$ [mm]	169	$n_{G, \text{Fett}}$ [min^{-1}]	4500
$r_{a, \max}$ [mm]	2	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	5300