

NNU4148S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	240	D_1 [mm]	≈ 349.2
D [mm]	400	d_s [mm]	9.5
B [mm]	160	n_s [mm]	17.7
Weight [kg]	≈ 82.1	$r_{1,2}$ [mm]	4
F [mm]	282	s [mm]	4.6

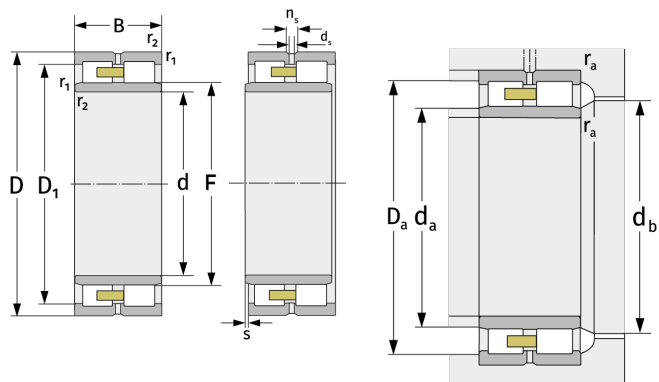

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	257	C [kN]	1970
$d_{a, \max}$ [mm]	278	C_0 [kN]	3580
$d_{b, \min}$ [mm]	285	C_u [kN]	349
$D_{a, \max}$ [mm]	383	$n_{G, \text{Fett}}$ [min^{-1}]	1900
$r_{a, \max}$ [mm]	3	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	2300