

NNU4826S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	130	D_1 [mm]	≈ 152.1
D [mm]	165	d_s [mm]	3.2
B [mm]	35	n_s [mm]	4.8
Weight [kg]	≈ 1	$r_{1,2}$ [mm]	1.1
F [mm]	142.5	s [mm]	2.3

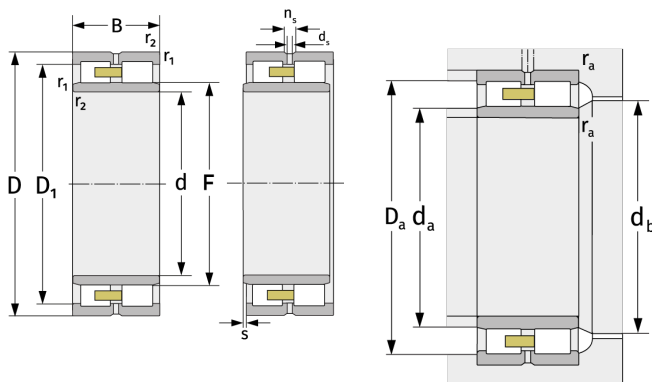

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	136	C [kN]	101
$d_{a, \max}$ [mm]	141	C_0 [kN]	246
$d_{b, \min}$ [mm]	145	C_u [kN]	30
$D_{a, \max}$ [mm]	159	$n_{G, \text{Fett}}$ [min^{-1}]	4400
$r_{a, \max}$ [mm]	1	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	5200