

NNU4848S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	240	D_1 [mm]	≈ 278.7
D [mm]	300	d_s [mm]	3.2
B [mm]	60	n_s [mm]	6.5
Weight [kg]	≈ 10	$r_{1,2}$ [mm]	2
F [mm]	259.5	s [mm]	3.5

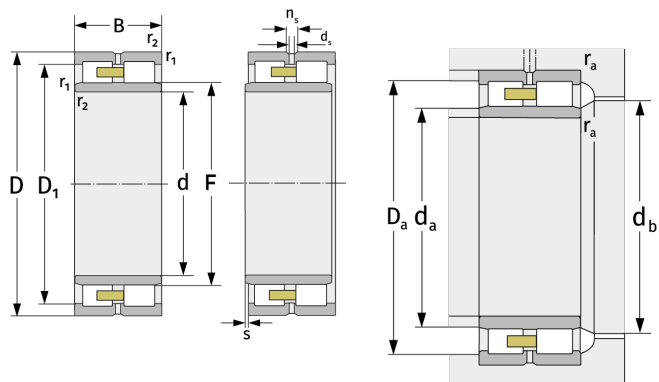

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	249	C [kN]	361
$d_{a, \max}$ [mm]	258	C_0 [kN]	945
$d_{b, \min}$ [mm]	263	C_u [kN]	96.8
$D_{a, \max}$ [mm]	291	$n_{G, \text{Fett}}$ [min^{-1}]	2400
$r_{a, \max}$ [mm]	2	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	2800