

NNU4924S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	120	D_1 [mm]	≈ 150.5
D [mm]	165	d_s [mm]	3.2
B [mm]	45	n_s [mm]	6.5
Weight [kg]	≈ 2.88	$r_{1,2}$ [mm]	1.1
F [mm]	134.5	s [mm]	2.3

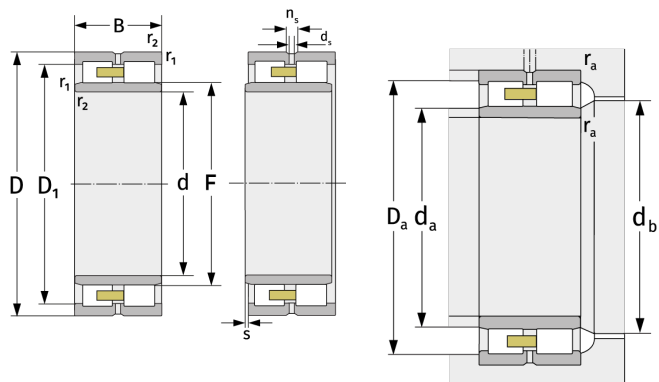

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	126	C [kN]	176
$d_{a, \max}$ [mm]	133	C_0 [kN]	341
$d_{b, \min}$ [mm]	137	C_u [kN]	41.9
$D_{a, \max}$ [mm]	159	$n_{G, \text{Fett}}$ [min^{-1}]	4600
$r_{a, \max}$ [mm]	1	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	5300