

NNU4972S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	360	D_1 [mm]	≈ 439
D [mm]	480	d_s [mm]	9.5
B [mm]	118	n_s [mm]	17.7
Weight [kg]	≈ 60.6	$r_{1,2}$ [mm]	3
F [mm]	399	s [mm]	6.3

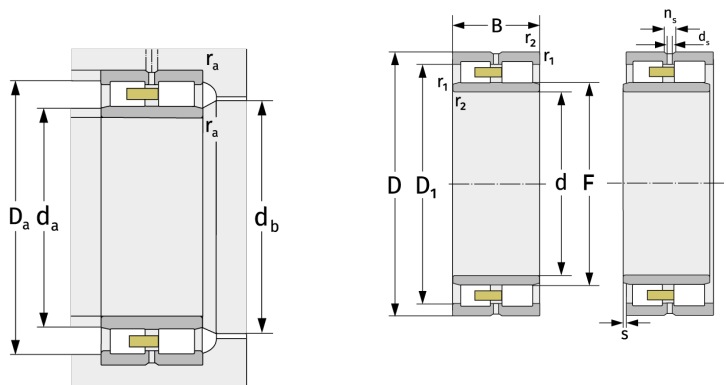

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	372	C [kN]	1170
$d_{a, \max}$ [mm]	395	C_0 [kN]	2920
$d_{b, \min}$ [mm]	403	C_u [kN]	264
$D_{a, \max}$ [mm]	468	$n_{G, \text{Fett}}$ [min^{-1}]	1400
$r_{a, \max}$ [mm]	2.5	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	1700