

NNU6092M


Cylindrical Roller Bearings (multi row, with cage)



Details:

Main dimensions

d [mm]	460	d_s [mm]	8
D [mm]	680	n_s [mm]	15
B [mm]	400	$r_{1,2}$ [mm]	6
Weight [kg]	≈ 526	$r_{3,4}$ [mm]	6
F [mm]	530	s [mm]	10
D_1 [mm]	≈ 602		

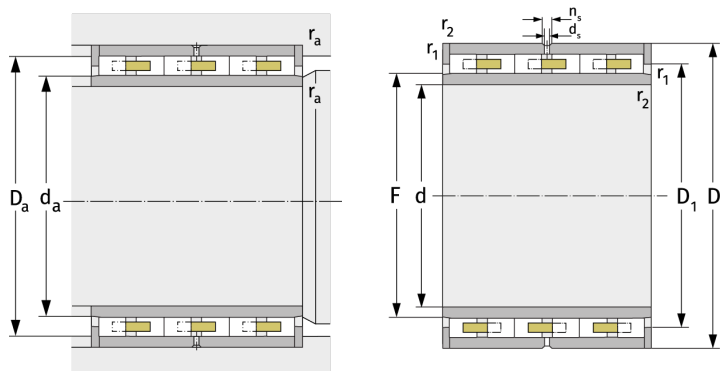

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	511	C [kN]	5550
$D_{a, \max}$ [mm]	657	C_0 [kN]	15700
$r_{a, \max}$ [mm]	5	C_u [kN]	1297
$r_{b, \max}$ [mm]	5	n_g [min^{-1}]	870