

NU2008E.M3


Cylindrical Roller Bearings (single row, with cage)



Details:

Main dimensions

d [mm]	40	D_1 [mm]	≈ 59
D [mm]	68	$r_{1,2}$ [mm]	1
B [mm]	18	$r_{3,4}$ [mm]	0.6
Weight [kg]	≈ 0.266	s [mm]	1
F [mm]	47		

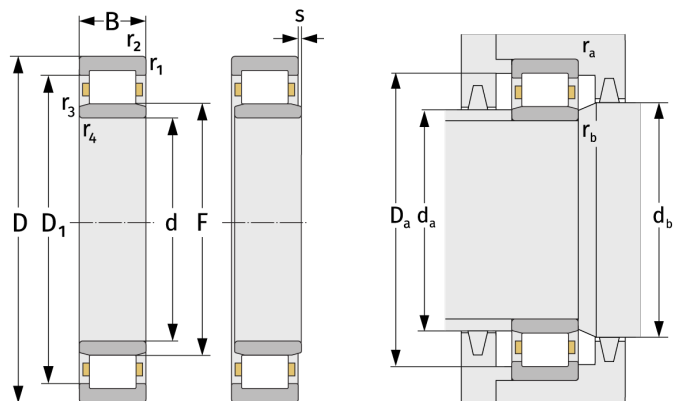

Mating dimensions

Calculation data

$d_{a, \min}$ [mm]	44.6	C [kN]	46.6
$d_{a, \max}$ [mm]	46	C_0 [kN]	55.2
$d_{b, \min}$ [mm]	48	C_u [kN]	7.25
$D_{a, \max}$ [mm]	63.4	n_{th} [min^{-1}]	8304
$r_{a, \max}$ [mm]	1	n_g [min^{-1}]	14000
$r_{b, \max}$ [mm]	0.6		