

NU6096M3



Cylindrical Roller Bearings (multi row, with cage)



Details:

Main dimensions

d [mm]	480	D_1 [mm]	≈ 622.4
D [mm]	700	$r_{1,2}$ [mm]	6
B [mm]	400	$r_{3,4}$ [mm]	6
Weight [kg]	≈ 529	s [mm]	10
F [mm]	536		

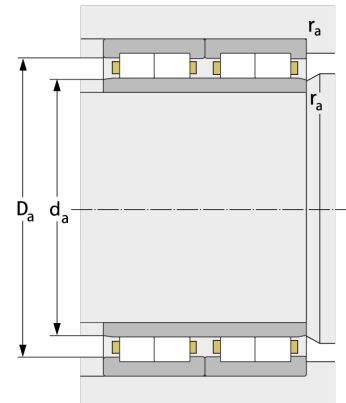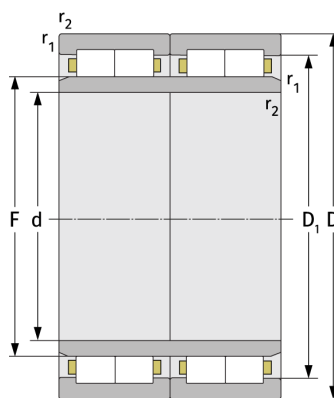

Mating dimensions

$d_{a, \min}$ [mm]

531

Calculation data

C [kN]

7000

$D_{a, \max}$ [mm]

677

C_0 [kN]

18700

$r_{a, \max}$ [mm]

5

C_u [kN]

1534

$r_{b, \max}$ [mm]

5

n_g [min^{-1}]

840