



# NUP2056E.M3

Cylindrical Roller Bearings (single row, with cage)



## Details:

Main dimensions			
d [mm]	280	d <sub>1</sub> [mm]	≈ 329.2
D [mm]	420	D <sub>1</sub> [mm]	≈ 374.8
B [mm]	82	r <sub>1,2</sub> [mm]	4
Weight [kg]	≈ 43.1	r <sub>3,4</sub> [mm]	4
F [mm]	314	s [mm]	4.5

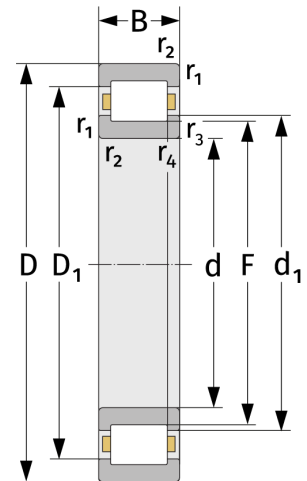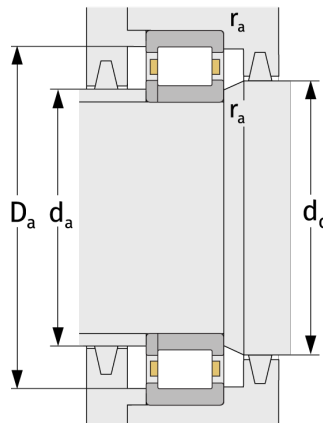

Mating dimensions		Calculation data	
d <sub>a, min</sub> [mm]	294.6	C [kN]	1260
d <sub>c, min</sub> [mm]	335	C <sub>0</sub> [kN]	2230
D <sub>a, max</sub> [mm]	405.4	C <sub>u</sub> [kN]	211
r <sub>a, max</sub> [mm]	3	n <sub>th</sub> [min <sup>-1</sup> ]	1085
		n <sub>g</sub> [min <sup>-1</sup> ]	2000