

NN30/600S.M



Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	600	d_1 [mm]	≈ 694.2
D [mm]	870	d_s [mm]	12.5
B [mm]	200	n_s [mm]	23.5
Weight [kg]	≈ 397	$r_{1,2}$ [mm]	6
E [mm]	803	s [mm]	11
E [mm]	803		

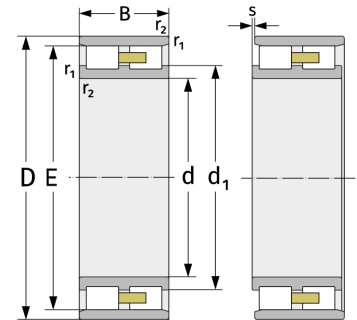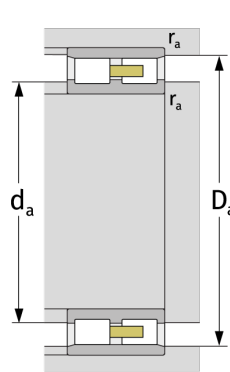

Mating dimensions		Calculation data	
$D_{a, \min}$ [mm]	807	C [kN]	4520
$d_{a, \min}$ [mm]	623	C_0 [kN]	9750
$D_{a, \min}$ [mm]	807	C_u [kN]	755
$D_{a, \max}$ [mm]	847	$n_{G, \text{Fett}}$ [min^{-1}]	730
$r_{a, \max}$ [mm]	5	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	850