

# NN3092S.M



Cylindrical Roller Bearings (double row, with cage)



## Details:

### Main dimensions

d [mm]	460	$d_1$ [mm]	≈ 544
D [mm]	680	$d_s$ [mm]	12.5
B [mm]	163	$n_s$ [mm]	23.5
Weight [kg]	≈ 206	$r_{1,2}$ [mm]	6
E [mm]	624	s [mm]	10.5
E [mm]	624		

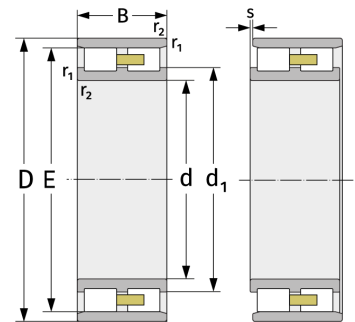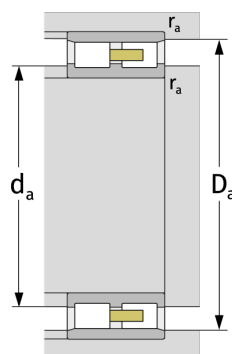

Mating dimensions		Calculation data	
$D_{a, \min}$ [mm]	628	C [kN]	2670
$d_{a, \min}$ [mm]	483	$C_0$ [kN]	5700
$D_{a, \min}$ [mm]	628	$C_u$ [kN]	472
$D_{a, \max}$ [mm]	657	$n_{G, \text{Fett}}$ [ $\text{min}^{-1}$ ]	990
$r_{a, \max}$ [mm]	5	$n_{G, \text{Öl-Luft}}$ [ $\text{min}^{-1}$ ]	1200