

NNCF49/600V



Cylindrical Roller Bearings (full complement, double row)



Details:

Main dimensions

d [mm]	600	d_s [mm]	4.8
D [mm]	800	n_s [mm]	9.5
B [mm]	200	$r_{1,2}$ [mm]	5
Weight [kg]	≈ 290	$r_{3,4}$ [mm]	5
d_1 [mm]	≈ 676.5	s [mm]	10
D_1 [mm]	≈ 730.5		

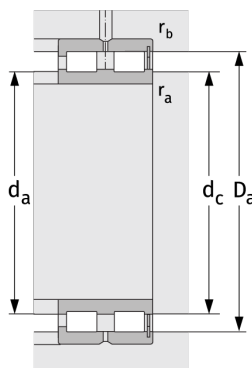

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	618	C [kN]	4530
$d_{c, \text{empf}}$ [mm]	670	C_0 [kN]	13100
$D_{a, \max}$ [mm]	782	C_u [kN]	1022
$r_{a, \max}$ [mm]	4	n_{th} [min^{-1}]	163
$r_{b, \max}$ [mm]	4	n_g [min^{-1}]	390