

NNU40/560S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	560	D_1 [mm]	≈ 732.4
D [mm]	820	d_s [mm]	9.5
B [mm]	258	n_s [mm]	17.7
Weight [kg]	≈ 470	$r_{1,2}$ [mm]	6
F [mm]	630	s [mm]	12.8

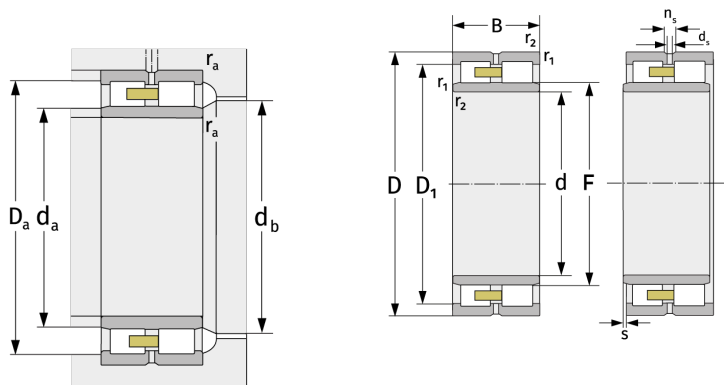

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	583	C [kN]	5600
$d_{a, \max}$ [mm]	626	C_0 [kN]	13100
$d_{b, \min}$ [mm]	634	C_u [kN]	1030
$D_{a, \max}$ [mm]	797	$n_{G, \text{Fett}}$ [min^{-1}]	780
$r_{a, \max}$ [mm]	5	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	920