

# NNU41/600S.M


Cylindrical Roller Bearings (double row, with cage)



## Details:

### Main dimensions

d [mm]	600	$D_1$ [mm]	≈ 859
D [mm]	980	$d_s$ [mm]	12.5
B [mm]	375	$n_s$ [mm]	23.5
Weight [kg]	≈ 1127	$r_{1,2}$ [mm]	7.5
F [mm]	699	s [mm]	18.5

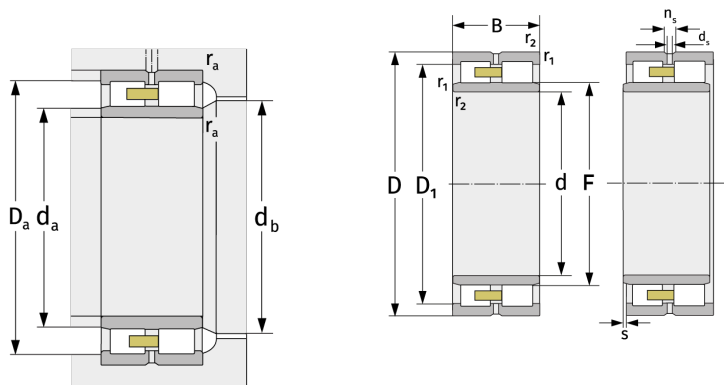

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	632	C [kN]	9950
$d_{a, \max}$ [mm]	692	$C_0$ [kN]	20900
$d_{b, \min}$ [mm]	704	$C_u$ [kN]	1580
$D_{a, \max}$ [mm]	948	$n_{G, \text{Fett}}$ [ $\text{min}^{-1}$ ]	650
$r_{a, \max}$ [mm]	6	$n_{G, \text{Öl-Luft}}$ [ $\text{min}^{-1}$ ]	770