

# NNU4132S.M


Cylindrical Roller Bearings (double row, with cage)



## Details:

### Main dimensions

d [mm]	160	$D_1$ [mm]	≈ 236
D [mm]	270	$d_s$ [mm]	6.3
B [mm]	109	$n_s$ [mm]	12.2
Weight [kg]	≈ 25.3	$r_{1,2}$ [mm]	2.1
F [mm]	188	s [mm]	4.1

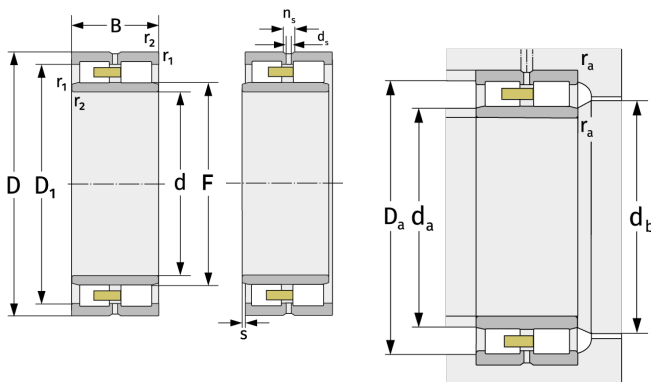

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	172	C [kN]	950
$d_{a, \max}$ [mm]	185	$C_0$ [kN]	1560
$d_{b, \min}$ [mm]	191	$C_u$ [kN]	171
$D_{a, \max}$ [mm]	258	$n_{G, \text{Fett}}$ [ $\text{min}^{-1}$ ]	3000
$r_{a, \max}$ [mm]	2.1	$n_{G, \text{Öl-Luft}}$ [ $\text{min}^{-1}$ ]	3500