

NNU4172S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	360	D_1 [mm]	≈ 524.4
D [mm]	600	d_s [mm]	12.5
B [mm]	243	n_s [mm]	23.5
Weight [kg]	≈ 282	$r_{1,2}$ [mm]	5
F [mm]	422	s [mm]	5.9

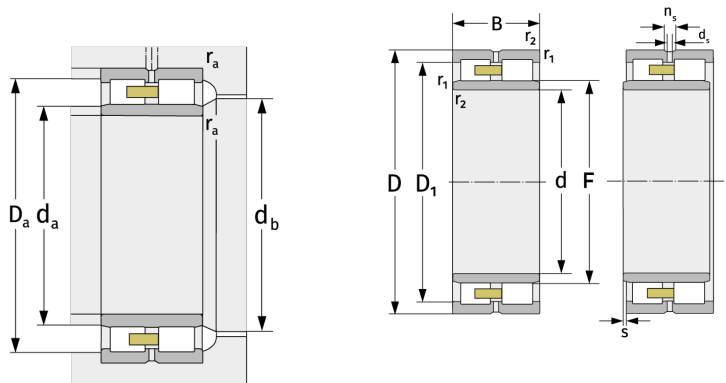

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	380	C [kN]	4360
$d_{a, \max}$ [mm]	416	C_0 [kN]	8500
$d_{b, \min}$ [mm]	426	C_u [kN]	740
$D_{a, \max}$ [mm]	580	$n_{G, \text{Fett}}$ [min^{-1}]	1200
$r_{a, \max}$ [mm]	4	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	1500