

NNU48/900S.M



Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	900	D_1 [mm]	≈
D [mm]	1090		1026.8
B [mm]	190	d_s [mm]	9.5
Weight [kg]	≈ 377	n_s [mm]	17.7
F [mm]	966	$r_{1,2}$ [mm]	5
		s [mm]	7.8

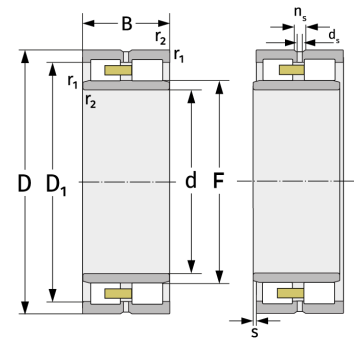

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	918	C [kN]	3560
$d_{a, \max}$ [mm]	962	C_0 [kN]	12300
$d_{b, \min}$ [mm]	971	C_u [kN]	870
$D_{a, \max}$ [mm]	1072	$n_{G, \text{Fett}}$ [min^{-1}]	480
$r_{a, \max}$ [mm]	4	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	560