

NNU4830S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	150	D_1 [mm]	≈ 175.8
D [mm]	190	d_s [mm]	3.2
B [mm]	40	n_s [mm]	6.5
Weight [kg]	≈ 2	$r_{1,2}$ [mm]	1.1
F [mm]	163	s [mm]	2.3

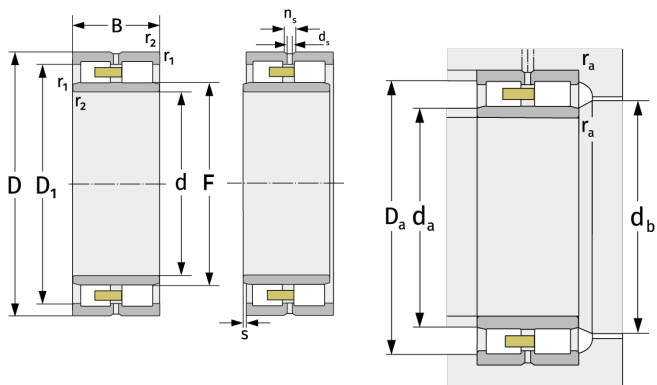

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	156	C [kN]	162
$d_{a, \max}$ [mm]	162	C_0 [kN]	384
$d_{b, \min}$ [mm]	166	C_u [kN]	44.9
$D_{a, \max}$ [mm]	184	$n_{G, \text{Fett}}$ [min^{-1}]	3800
$r_{a, \max}$ [mm]	1	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	4500