

NNU4922S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	110	D_1 [mm]	≈ 135.8
D [mm]	150	d_s [mm]	3.2
B [mm]	40	n_s [mm]	6.5
Weight [kg]	≈ 2.13	$r_{1,2}$ [mm]	1.1
F [mm]	123	s [mm]	2

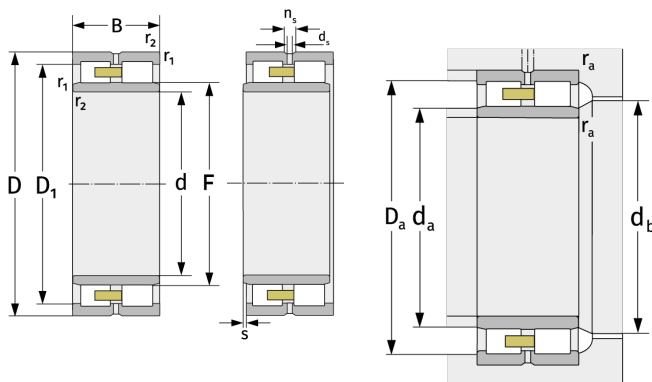

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	116	C [kN]	134
$d_{a, \max}$ [mm]	122	C_0 [kN]	274
$d_{b, \min}$ [mm]	125	C_u [kN]	34.6
$D_{a, \max}$ [mm]	144	$n_{G, \text{Fett}}$ [min^{-1}]	5000
$r_{a, \max}$ [mm]	1	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	5900