

NNU4930S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	150	D_1 [mm]	≈ 190.9
D [mm]	210	d_s [mm]	3.2
B [mm]	60	n_s [mm]	6.5
Weight [kg]	≈ 6.49	$r_{1,2}$ [mm]	2
F [mm]	168.5	s [mm]	2.7

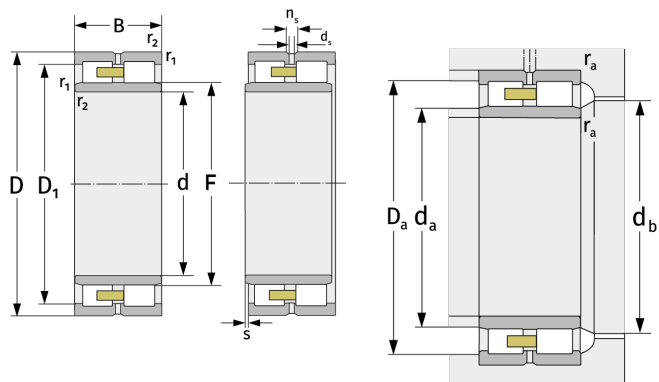

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	159	C [kN]	334
$d_{a, \max}$ [mm]	167	C_0 [kN]	665
$d_{b, \min}$ [mm]	172	C_u [kN]	76.3
$D_{a, \max}$ [mm]	201	$n_{G, \text{Fett}}$ [min^{-1}]	3600
$r_{a, \max}$ [mm]	2	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	4200