

# NNU4932S.M


Cylindrical Roller Bearings (double row, with cage)



## Details:

### Main dimensions

d [mm]	160	$D_1$ [mm]	$\approx 200.9$
D [mm]	220	$d_s$ [mm]	3.2
B [mm]	60	$n_s$ [mm]	6.5
Weight [kg]	$\approx 6.83$	$r_{1,2}$ [mm]	2
F [mm]	178.5	s [mm]	2.7

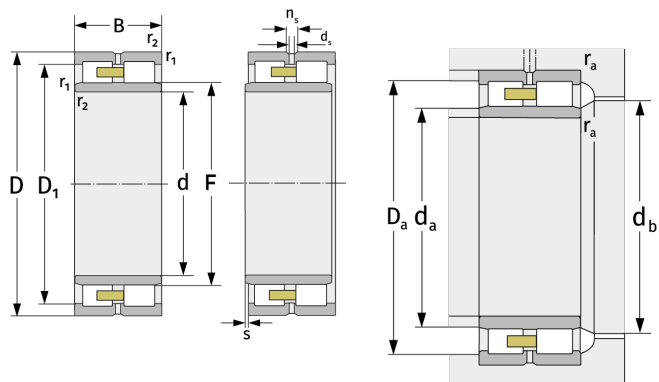

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	169	C [kN]	339
$d_{a, \max}$ [mm]	177	$C_0$ [kN]	690
$d_{b, \min}$ [mm]	182	$C_u$ [kN]	78
$D_{a, \max}$ [mm]	211	$n_{G, \text{Fett}}$ [ $\text{min}^{-1}$ ]	3400
$r_{a, \max}$ [mm]	2	$n_{G, \text{Öl-Luft}}$ [ $\text{min}^{-1}$ ]	4000