

NNU4936S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	180	D_1 [mm]	≈ 226
D [mm]	250	d_s [mm]	4.8
B [mm]	69	n_s [mm]	9.5
Weight [kg]	≈ 10.6	$r_{1,2}$ [mm]	2
F [mm]	202	s [mm]	3.2

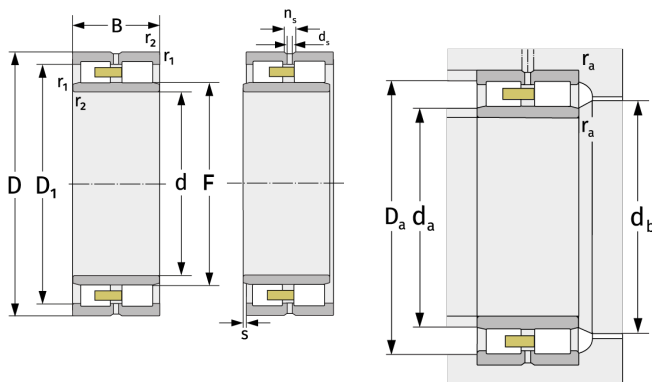

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	189	C [kN]	409
$d_{a, \max}$ [mm]	200	C_0 [kN]	870
$d_{b, \min}$ [mm]	205	C_u [kN]	95
$D_{a, \max}$ [mm]	241	$n_{G, \text{Fett}}$ [min^{-1}]	3000
$r_{a, \max}$ [mm]	2	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	3500