


NU2060E.M3



Cylindrical Roller Bearings (single row, with cage)



Details:

Main dimensions

d [mm]	300	D_1 [mm]	≈ 408.2
D [mm]	460	$r_{1,2}$ [mm]	4
B [mm]	95	$r_{3,4}$ [mm]	4
Weight [kg]	≈ 59.9	s [mm]	5.5
F [mm]	341		

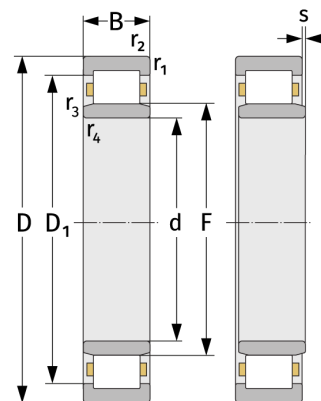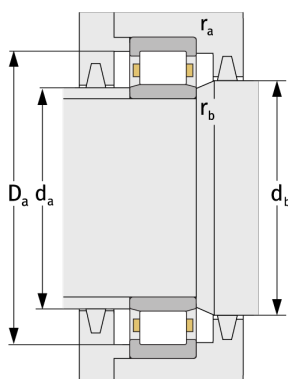

Mating dimensions

$d_{a, \min}$ [mm]	314.6
$d_{a, \max}$ [mm]	338
$d_{b, \min}$ [mm]	344
$D_{a, \max}$ [mm]	445.4
$r_{a, \max}$ [mm]	3
$r_{b, \max}$ [mm]	3

Calculation data

C [kN]	1500
C_0 [kN]	2670
C_u [kN]	248
n_{th} [min^{-1}]	990
n_g [min^{-1}]	1800