

NU2332E.M3


Cylindrical Roller Bearings (single row, with cage)



Details:

Main dimensions

d [mm]	160	D_1 [mm]	≈ 280.8
D [mm]	340	$r_{1,2}$ [mm]	4
B [mm]	114	$r_{3,4}$ [mm]	4
Weight [kg]	≈ 52.5	s [mm]	5.8
F [mm]	204		

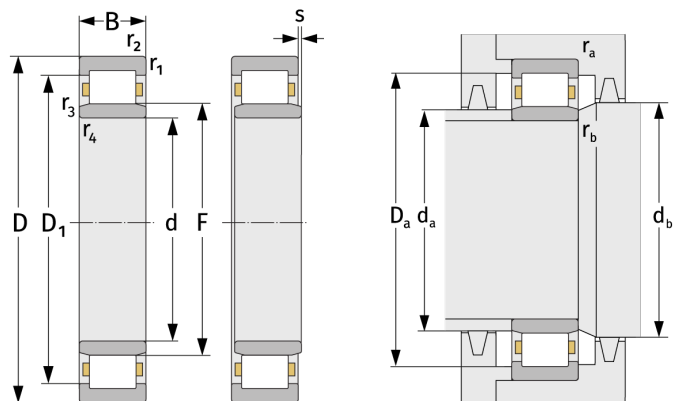

Mating dimensions

Calculation data

$d_{a, \min}$ [mm]	177	C [kN]	1330
$d_{a, \max}$ [mm]	200	C_0 [kN]	1850
$d_{b, \min}$ [mm]	211	C_u [kN]	193
$D_{a, \max}$ [mm]	323	n_{th} [min^{-1}]	1343
$r_{a, \max}$ [mm]	3	n_g [min^{-1}]	2800
$r_{b, \max}$ [mm]	3		