

NU2819M3


Cylindrical Roller Bearings (single row, with cage)



Details:

Main dimensions

d [mm]	95	D_1 [mm]	≈ 111.9
D [mm]	120	$r_{1,2}$ [mm]	1
B [mm]	16	$r_{3,4}$ [mm]	0.6
F [mm]	101.5	s [mm]	2

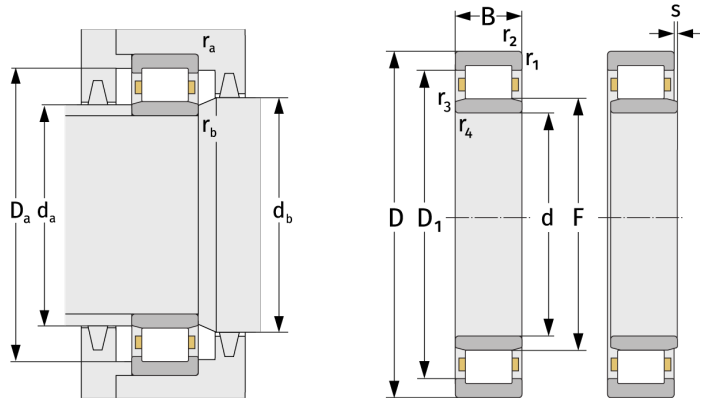

Mating dimensions

$d_{a, \min}$ [mm]	99.6
$d_{a, \max}$ [mm]	100
$d_{b, \min}$ [mm]	104
$D_{a, \max}$ [mm]	115.4
$r_{a, \max}$ [mm]	1
$r_{b, \max}$ [mm]	0.6

Calculation data

C [kN]	52.3
C_0 [kN]	89.1
C_u [kN]	11.9
n_{th} [min^{-1}]	3651
n_g [min^{-1}]	6800