

NU6080M3



Cylindrical Roller Bearings (multi row, with cage)



Details:

Main dimensions

d [mm]	400	D_1 [mm]	≈ 530
D [mm]	600	$r_{1,2}$ [mm]	5
B [mm]	355	$r_{3,4}$ [mm]	5
Weight [kg]	≈ 360	s [mm]	10
F [mm]	450		

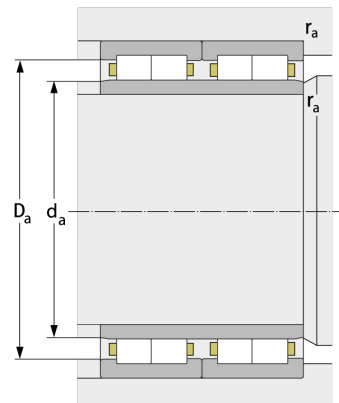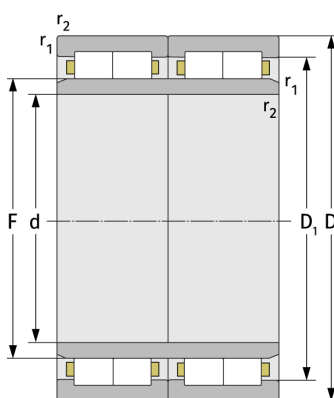

Mating dimensions

$d_{a, \min}$ [mm]

446

$D_{a, \max}$ [mm]

582

$r_{a, \max}$ [mm]

4

$r_{b, \max}$ [mm]

4

Calculation data

C [kN]

5550

C_0 [kN]

13800

C_u [kN]

1187

n_g [min^{-1}]

1100