

NUP20/530E.M3


Cylindrical Roller Bearings (single row, with cage)



Details:

Main dimensions

d [mm]	530	d ₁ [mm]	≈ 620
D [mm]	780	D ₁ [mm]	≈ 698
B [mm]	145	r _{1,2} [mm]	6
Weight [kg]	≈ 254	r _{3,4} [mm]	6
F [mm]	594	s [mm]	8

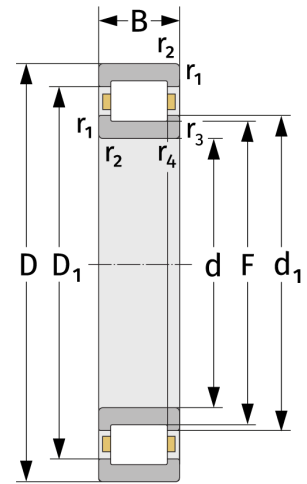

Mating dimensions		Calculation data	
d _{a, min} [mm]	553	C [kN]	3520
d _{c, min} [mm]	626	C ₀ [kN]	7050
D _{a, max} [mm]	757	C _u [kN]	559
r _{a, max} [mm]	5	n _{th} [min ⁻¹]	454
		n _g [min ⁻¹]	920