

NUP20/600E.M3


Cylindrical Roller Bearings (single row, with cage)



Details:

Main dimensions

d [mm]	600	d ₁ [mm]	≈ 697
D [mm]	870	D ₁ [mm]	≈ 781
B [mm]	155	r _{1,2} [mm]	6
Weight [kg]	≈ 328	r _{3,4} [mm]	6
F [mm]	669	s [mm]	8.5

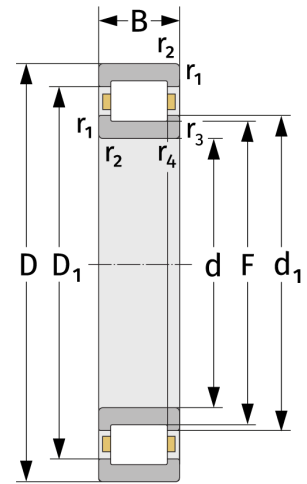

Mating dimensions		Calculation data	
d _{a, min} [mm]	623	C [kN]	4100
d _{c, min} [mm]	702	C ₀ [kN]	8450
D _{a, max} [mm]	847	C _u [kN]	648
r _{a, max} [mm]	5	n _{th} [min ⁻¹]	385
		n _g [min ⁻¹]	790