

NUP20/630E.M3


Cylindrical Roller Bearings (single row, with cage)



Details:

Main dimensions

d [mm]	630	d ₁ [mm]	≈ 735
D [mm]	920	D ₁ [mm]	≈ 825
B [mm]	170	r _{1,2} [mm]	7.5
Weight [kg]	≈ 410	r _{3,4} [mm]	7.5
F [mm]	705	s [mm]	8.5

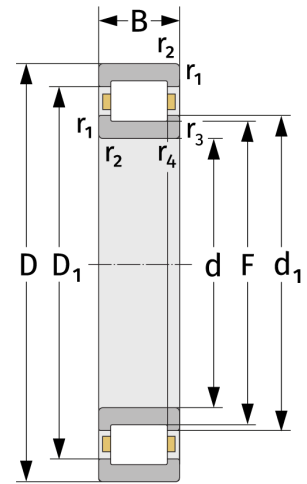

Mating dimensions		Calculation data	
d _{a, min} [mm]	658	C [kN]	4840
d _{c, min} [mm]	740	C ₀ [kN]	10200
D _{a, max} [mm]	892	C _u [kN]	765
r _{a, max} [mm]	6	n _{th} [min ⁻¹]	344
		n _g [min ⁻¹]	740