

# NUP29/950E.M3



Cylindrical Roller Bearings (single row, with cage)



## Details:

### Main dimensions

d [mm]	950	d <sub>1</sub> [mm]	≈ 1056
D [mm]	1250	D <sub>1</sub> [mm]	≈ 1152
B [mm]	175	r <sub>1,2</sub> [mm]	7.5
Weight [kg]	≈ 608	r <sub>3,4</sub> [mm]	7.5
F [mm]	1024	s [mm]	9.8

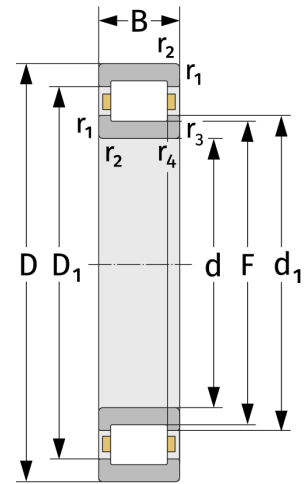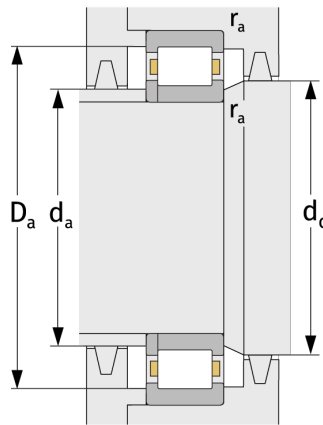

Mating dimensions		Calculation data	
d <sub>a, min</sub> [mm]	978	C [kN]	5850
d <sub>c, min</sub> [mm]	1062	C <sub>0</sub> [kN]	13900
D <sub>a, max</sub> [mm]	1222	C <sub>u</sub> [kN]	953
r <sub>a, max</sub> [mm]	6	n <sub>th</sub> [min <sup>-1</sup> ]	223
		n <sub>g</sub> [min <sup>-1</sup> ]	460