

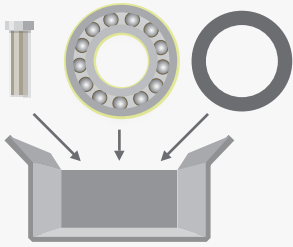




# Packing of damaged bearings





Pack the rolling bearing in a dismounted state. Please do not remove lubricants etc. from the bearing. Make sure that **all** components, seals and a lubricant sample are packed.





Avoid direct contact with the metal. Wear gloves **throughout the whole** packaging process.

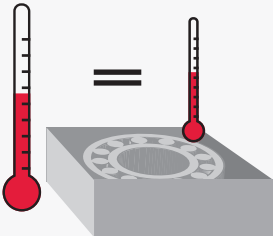


Pack the bearing at room temperature and avoid packing components that are too cold or too hot.

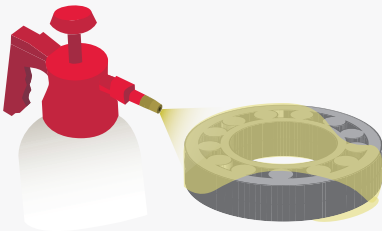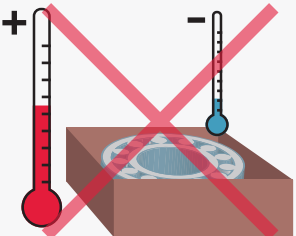


Preserve the bearing with oil or grease to avoid corrosion.

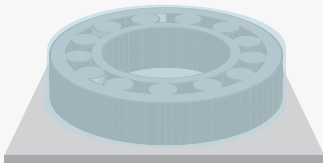

Avoid direct contact of bearings and components with paper, cardboard or wood. Pack the bearings in a separate plastic bag.

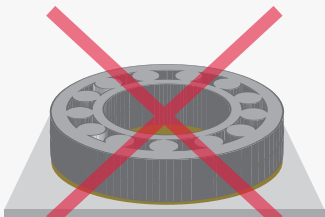

Use a sturdy crate or the original packaging to avoid further damage to the bearing. Close the packaging with waterproof adhesive tape or with a solid screw connection (wooden crate).

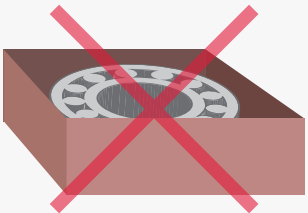

To stabilize the packaging and protect the bearings, we recommend the use of cardboard or wood parting boards and additional material for upholstery.

