
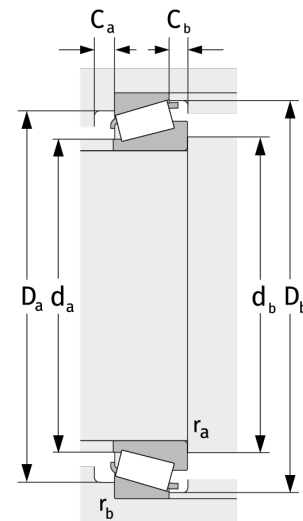


## Details:

Hauptabmessungen			
d [mm]	95	B [mm]	45
D [mm]	200	d <sub>1</sub> [mm]	≈ 146,7
T [mm]	49,5	r <sub>1,2</sub> [mm]	4
Gewicht [kg]	≈ 6,58	r <sub>3,4</sub> [mm]	3
		a [mm]	≈ 64,3
C [mm]	32		

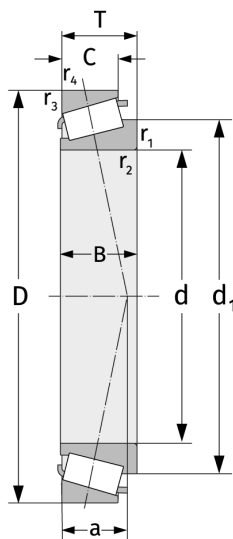

Anschlussmaße		Berechnungsdaten	
d <sub>a,max</sub> [mm]	110	C [kN]	320
d <sub>b,min</sub> [mm]	109	C <sub>0</sub> [kN]	387
D <sub>a,min</sub> [mm]	158	C <sub>u</sub> [kN]	41,3
D <sub>a,max</sub> [mm]	186	n <sub>th</sub> [min <sup>-1</sup> ]	2690
D <sub>b,min</sub> [mm]	190	n <sub>g</sub> [min <sup>-1</sup> ]	3600
C <sub>a,min</sub> [mm]	6	e	0,83
C <sub>b,min</sub> [mm]	17	Y	0,73
r <sub>a,max</sub> [mm]	4	Y <sub>0</sub>	0,4
r <sub>b,max</sub> [mm]	3		