


# 51280MP

Axialrillenkugellager (einseitig wirkend, metrisch)



## Details:

| Hauptabmessungen |        |                       |       |
|------------------|--------|-----------------------|-------|
| d [mm]           | 400    | d <sub>1</sub> [mm]   | ≈ 535 |
| D [mm]           | 540    | D <sub>1</sub> [mm]   | ≈ 405 |
| T [mm]           | 112    | r <sub>1,2</sub> [mm] | 4     |
| Gewicht [kg]     | ≈ 76,6 |                       |       |

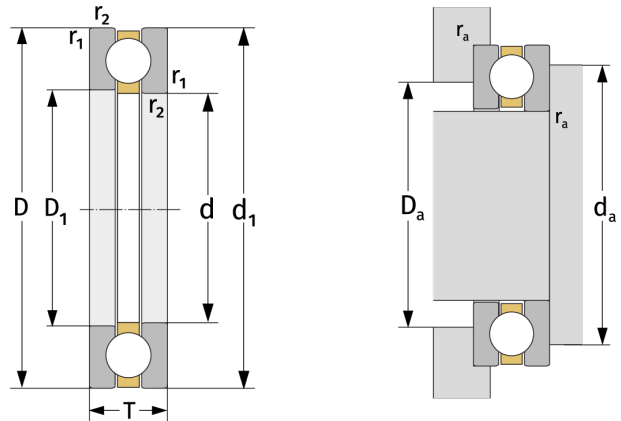

| Anschlussmaße           |     | Berechnungsdaten                    |      |
|-------------------------|-----|-------------------------------------|------|
| d <sub>a,min</sub> [mm] | 484 | C [kN]                              | 765  |
| D <sub>a,max</sub> [mm] | 456 | C <sub>0</sub> [kN]                 | 4340 |
| r <sub>a,max</sub> [mm] | 3   | C <sub>u</sub> [kN]                 | 70,3 |
|                         |     | n <sub>g</sub> [min <sup>-1</sup> ] | 700  |
|                         |     | A                                   | 97,2 |