


51284MP

Axialrillenkugellager (einseitig wirkend, metrisch)



Details:

| Hauptabmessungen | | | |
|------------------|-------|-----------------------|-------|
| d [mm] | 420 | d ₁ [mm] | ≈ 575 |
| D [mm] | 580 | D ₁ [mm] | ≈ 425 |
| T [mm] | 130 | r _{1,2} [mm] | 5 |
| Gewicht [kg] | ≈ 109 | | |

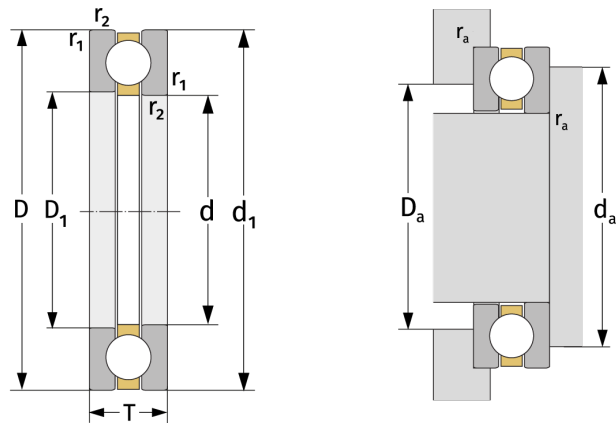

| Anschlussmaße | | Berechnungsdaten | |
|-------------------------|-----|-------------------------------------|------|
| d _{a,min} [mm] | 516 | C [kN] | 895 |
| D _{a,max} [mm] | 484 | C ₀ [kN] | 5300 |
| r _{a,max} [mm] | 4 | C _u [kN] | 83,3 |
| | | n _g [min ⁻¹] | 610 |
| | | A | 145 |