


# 618/1060M

Rillenkugellager (einreihig, metrisch)



## Details:

| Hauptabmessungen |       |                       |          |
|------------------|-------|-----------------------|----------|
| d [mm]           | 1060  | d <sub>1</sub> [mm]   | ≈ 1130,6 |
| D [mm]           | 1280  | D <sub>1</sub> [mm]   | ≈ 1210,6 |
| B [mm]           | 100   | r <sub>1,2</sub> [mm] | 6        |
| Gewicht [kg]     | ≈ 262 |                       |          |

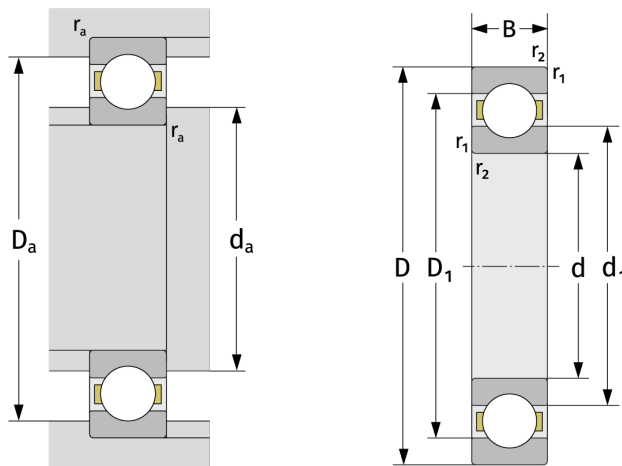

| Anschlussmaße           |      | Berechnungsdaten                     |      |
|-------------------------|------|--------------------------------------|------|
| d <sub>a,min</sub> [mm] | 1083 | C [kN]                               | 765  |
| D <sub>a,max</sub> [mm] | 1257 | C <sub>0</sub> [kN]                  | 2040 |
| r <sub>a,max</sub> [mm] | 5    | C <sub>u</sub> [kN]                  | 28,9 |
|                         |      | n <sub>th</sub> [min <sup>-1</sup> ] | 463  |
|                         |      | n <sub>g</sub> [min <sup>-1</sup> ]  | 560  |
|                         |      | f <sub>0</sub>                       | 15,8 |