

61960M


Rillenkugellager (einreihig, metrisch)



Details:

Hauptabmessungen

| | | | |
|--------------|--------|-----------------------|---------|
| d [mm] | 300 | d ₁ [mm] | ≈ 337,4 |
| D [mm] | 420 | D ₁ [mm] | ≈ 383,4 |
| B [mm] | 56 | r _{1,2} [mm] | 3 |
| Gewicht [kg] | ≈ 24,5 | | |

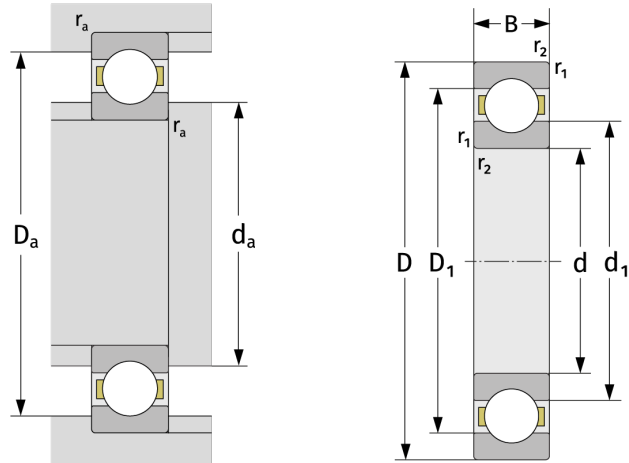

Anschlussmaße

| | |
|-------------------------|-----|
| d _{a,min} [mm] | 312 |
| D _{a,max} [mm] | 408 |
| r _{a,max} [mm] | 2,5 |

Berechnungsdaten

| | |
|--------------------------------------|------|
| C [kN] | 270 |
| C ₀ [kN] | 369 |
| C _u [kN] | 9,71 |
| n _{th} [min ⁻¹] | 1909 |
| n _g [min ⁻¹] | 2500 |
| f ₀ | 16,3 |