

NNCF49/600V



Zylinderrollenlager (zweireihig, vollrollig)



Details:

Hauptabmessungen

| | | | |
|--------------|---------|----------------|-----|
| d [mm] | 600 | d_s [mm] | 4,8 |
| D [mm] | 800 | n_s [mm] | 9,5 |
| B [mm] | 200 | $r_{1,2}$ [mm] | 5 |
| Gewicht [kg] | ≈ 290 | $r_{3,4}$ [mm] | 5 |
| | | s [mm] | 10 |
| d_1 [mm] | ≈ 676,5 | | |
| D_1 [mm] | ≈ 730,5 | | |

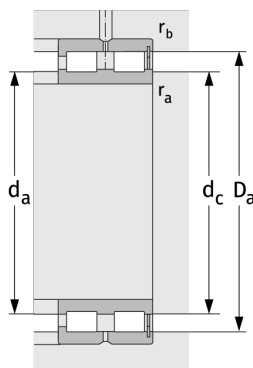

| Anschlussmaße | | Berechnungsdaten | |
|---------------------------|-----|-------------------------------|-------|
| $d_{a, \min}$ [mm] | 618 | C [kN] | 4530 |
| $d_{c, \text{empf}}$ [mm] | 670 | C_0 [kN] | 13100 |
| $D_{a, \max}$ [mm] | 782 | C_u [kN] | 1022 |
| $r_{a, \max}$ [mm] | 4 | n_{th} [min ⁻¹] | 163 |
| $r_{b, \max}$ [mm] | 4 | n_g [min ⁻¹] | 390 |