

NNU40/630S.M



Zylinderrollenlager (zweireihig, mit Käfig)



Details:

Hauptabmessungen

d [mm]	630	D_1 [mm]	$\approx 818,2$
D [mm]	920	d_s [mm]	12,5
B [mm]	290	n_s [mm]	23,5
Gewicht [kg]	≈ 667	$r_{1,2}$ [mm]	7,5
		s [mm]	10,2
F [mm]	703		

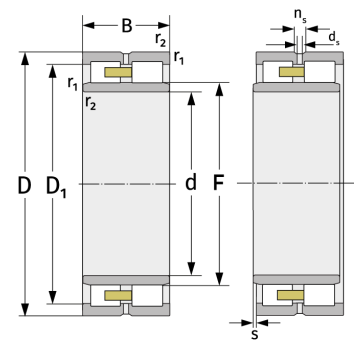

Anschlussmaße		Berechnungsdaten	
$d_{a, \min}$ [mm]	658	C [kN]	7350
$d_{a, \max}$ [mm]	697	C_0 [kN]	17700
$d_{b, \min}$ [mm]	708	C_u [kN]	1350
$D_{a, \max}$ [mm]	892	$n_{G, \text{Fett}}$ [min^{-1}]	680
$r_{a, \max}$ [mm]	6	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	800