

NNU40/710S.M



Zylinderrollenlager (zweireihig, mit Käfig)



Details:

Hauptabmessungen

d [mm]	710	D_1 [mm]	≈ 920
D [mm]	1030	d_s [mm]	12,5
B [mm]	315	n_s [mm]	23,5
Gewicht [kg]	≈ 888	$r_{1,2}$ [mm]	7,5
		s [mm]	10,9
F [mm]	784		

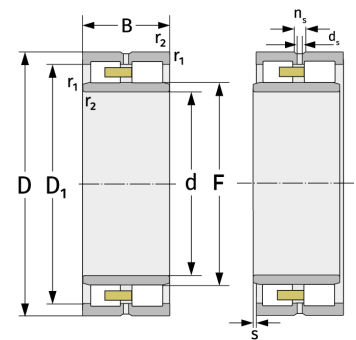

Anschlussmaße		Berechnungsdaten	
$d_{a, \min}$ [mm]	738	C [kN]	9150
$d_{a, \max}$ [mm]	777	C_0 [kN]	21800
$d_{b, \min}$ [mm]	789	C_u [kN]	1610
$D_{a, \max}$ [mm]	1002	$n_{G, \text{Fett}}$ [min^{-1}]	580
$r_{a, \max}$ [mm]	6	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	690