

NNU48/630S.M



Zylinderrollenlager (zweireihig, mit Käfig)



Details:

Hauptabmessungen

d [mm]	630	D_1 [mm]	≈ 726
D [mm]	780	d_s [mm]	9,5
B [mm]	150	n_s [mm]	17,7
Gewicht [kg]	≈ 165	$r_{1,2}$ [mm]	4
		s [mm]	7,8
F [mm]	678		

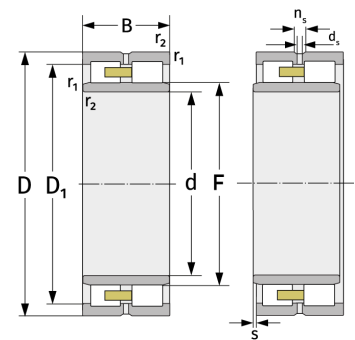

Anschlussmaße		Berechnungsdaten	
$d_{a, \min}$ [mm]	645	C [kN]	2160
$d_{a, \max}$ [mm]	674	C_0 [kN]	6750
$d_{b, \min}$ [mm]	683	C_u [kN]	530
$D_{a, \max}$ [mm]	765	$n_{G, \text{Fett}}$ [min^{-1}]	760
$r_{a, \max}$ [mm]	3	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	890