

NNU4830S.M


Zylinderrollenlager (zweireihig, mit Käfig)



Details:

Hauptabmessungen

d [mm]	150	D_1 [mm]	$\approx 175,8$
D [mm]	190	d_s [mm]	3,2
B [mm]	40	n_s [mm]	6,5
Gewicht [kg]	$\approx 2,8$	$r_{1,2}$ [mm]	1,1
F [mm]	163	s [mm]	2,3

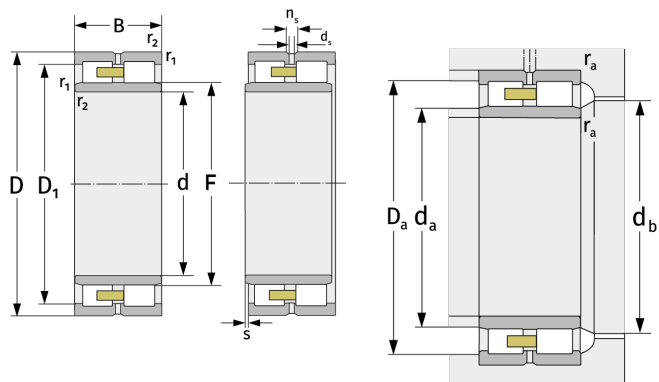

Anschlussmaße		Berechnungsdaten	
$d_{a, \min}$ [mm]	156	C [kN]	162
$d_{a, \max}$ [mm]	162	C_0 [kN]	384
$d_{b, \min}$ [mm]	166	C_u [kN]	44,9
$D_{a, \max}$ [mm]	184	$n_{G, \text{Fett}}$ [min^{-1}]	3800
$r_{a, \max}$ [mm]	1	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	4500