

NNU4124S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	120	D_1 [mm]	≈ 174.6
D [mm]	200	d_s [mm]	3.2
B [mm]	80	n_s [mm]	6.5
Weight [kg]	≈ 10.2	$r_{1,2}$ [mm]	2
F [mm]	141	s [mm]	1

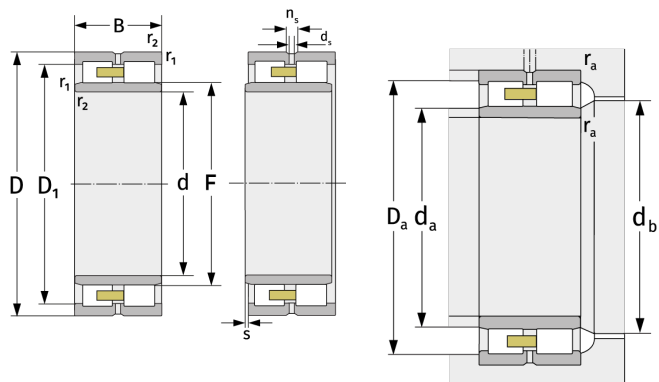

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	131	C [kN]	525
$d_{a, \max}$ [mm]	138	C_0 [kN]	850
$d_{b, \min}$ [mm]	143	C_u [kN]	101
$D_{a, \max}$ [mm]	189	$n_{G, \text{Fett}}$ [min^{-1}]	4000
$r_{a, \max}$ [mm]	2	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	4700