

NNU40/900S.M


Cylindrical Roller Bearings (double row, with cage)



Details:

Main dimensions

d [mm]	900	D_1 [mm]	≈ 1150
D [mm]	1280	d_s [mm]	12.5
B [mm]	375	n_s [mm]	23.5
Weight [kg]	≈ 1578	$r_{1,2}$ [mm]	7.5
F [mm]	990	s [mm]	17.8

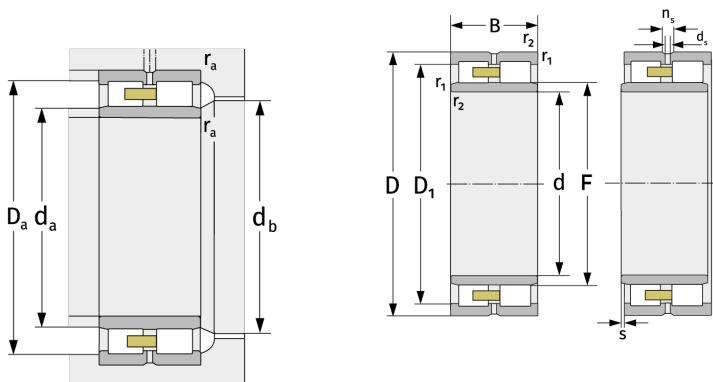

Mating dimensions		Calculation data	
$d_{a, \min}$ [mm]	928	C [kN]	12800
$d_{a, \max}$ [mm]	985	C_0 [kN]	32200
$d_{b, \min}$ [mm]	995	C_u [kN]	2220
$D_{a, \max}$ [mm]	1252	$n_{G, \text{Fett}}$ [min^{-1}]	420
$r_{a, \max}$ [mm]	6	$n_{G, \text{Öl-Luft}}$ [min^{-1}]	500