


32330A

Kegelrollenlager (einreihig, metrisch)



Details:

| Hauptabmessungen | | | |
|------------------|------|-----------------------|---------|
| d [mm] | 150 | B [mm] | 108 |
| D [mm] | 320 | d ₁ [mm] | ≈ 227,7 |
| T [mm] | 114 | r _{1,2} [mm] | 5 |
| Gewicht [kg] | ≈ 42 | r _{3,4} [mm] | 4 |
| | | a [mm] | ≈ 76,3 |
| C [mm] | 90 | | |

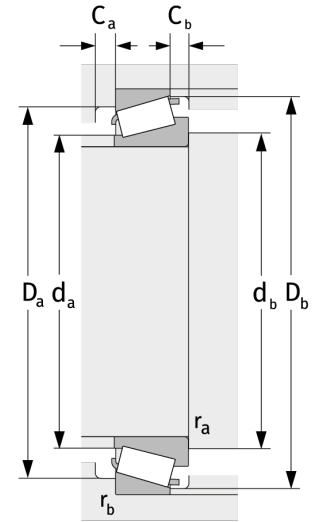

| Anschlussmaße | | Berechnungsdaten | |
|-------------------------|-----|--------------------------------------|------|
| d _{a,max} [mm] | 184 | C [kN] | 1280 |
| d _{b,min} [mm] | 167 | C ₀ [kN] | 1860 |
| D _{a,min} [mm] | 264 | C _u [kN] | 177 |
| D _{a,max} [mm] | 302 | n _{th} [min ⁻¹] | 1365 |
| D _{b,min} [mm] | 299 | n _g [min ⁻¹] | 2200 |
| C _{a,min} [mm] | 12 | e | 0,35 |
| C _{b,min} [mm] | 24 | Y | 1,74 |
| r _{a,max} [mm] | 5 | Y ₀ | 0,96 |
| r _{b,max} [mm] | 4 | | |